



# CBSW4-S

Main features:

Voltage, current and charging profile  
configurable with smart cards (provided separately)


Power from 480W up to 2160W

Voltage 12V, 24V, 36V and 48V

Current from 40A to 60A

## APPLICATIONS



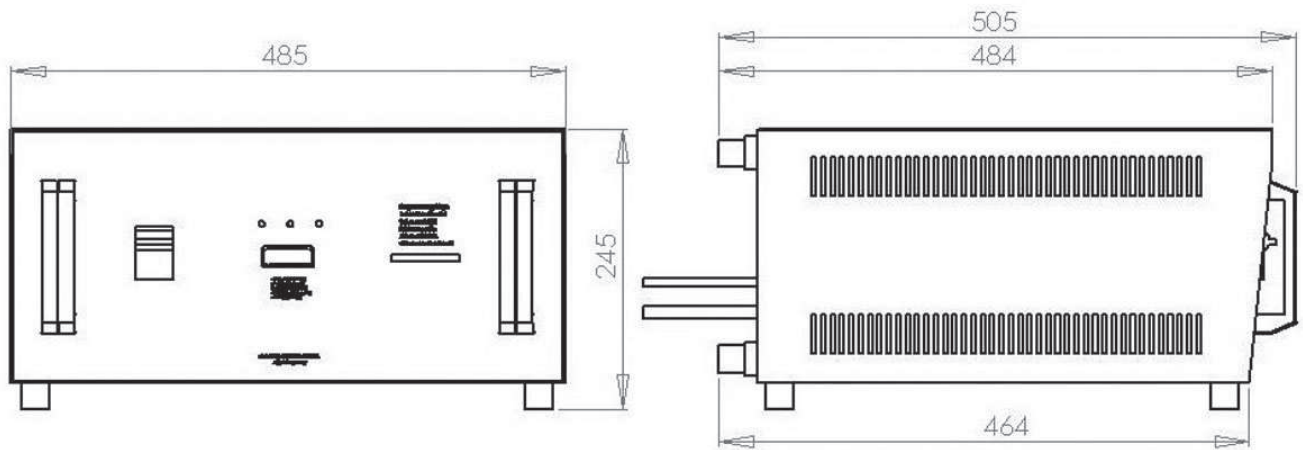

DIMENSIONS (LxWxH): 485x505x245 mm – 19.09x19.88x9.65 in

WEIGHT: 36,40-49 Kg – 80.25-108 lbs

PROTECTION GRADE IP20

INPUT VOLTAGE: 240 Vac – 50-60 Hz

Battery Voltage	Battery Range		Charging Current	Model
	5h	20h		
12V	300 ÷ 360 Ah	370 ÷ 450 Ah	40A	12-40
	360 ÷ 440 Ah	420 ÷ 540 Ah	50A	12-50
	450 ÷ 550 Ah	560 ÷ 650 Ah	60A	12-60
	300 ÷ 360 Ah	370 ÷ 450 Ah	40A	24-40
	360 ÷ 440 Ah	420 ÷ 540 Ah	50A	24-50
24V	450 ÷ 550 Ah	560 ÷ 650 Ah	60A	24-60
	260 ÷ 320 Ah	340 ÷ 425 Ah	30A	36-30
	300 ÷ 360 Ah	370 ÷ 450 Ah	40A	36-40
36V	360 ÷ 440 Ah	420 ÷ 540 Ah	50A	36-50
	450 ÷ 550 Ah	505 ÷ 675 Ah	60A	36-60
48V	285 ÷ 360 Ah	335 ÷ 450 Ah	40A	48-40