



CBHD1-XR-M

Main features:

Advanced and innovative resonant technology

Power from 95W up to 360W


Current from 8A to 13A

STAND-ALONE application

Configurable through membrane keyboard

APPLICATIONS



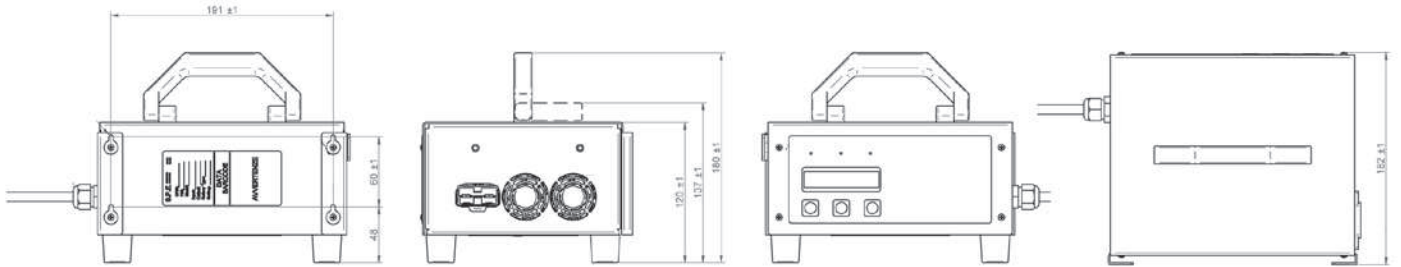

DIMENSIONS (LxWxH): 210x182x137 mm – 8.27x7.17x5.39 in

WEIGHT: 3,10 Kg – 6.84 lbs

PROTECTION GRADE IP30

INPUT VOLTAGE: Universal 100 ÷ 240 Vac – 50-60 Hz

Battery Voltage	Battery Range		Charging Current	Model
	5h	20h		
12V	40 ÷ 80 Ah	60 ÷ 105 Ah	8A	12-8
	60 ÷ 100 Ah	70 ÷ 130 Ah	10A	12-10
	80 ÷ 130 Ah	90 ÷ 150 Ah	13A	12-13
24V	40 ÷ 80 Ah	60 ÷ 105 Ah	8A	24-8
	60 ÷ 100 Ah	70 ÷ 130 Ah	10A	24-10
	80 ÷ 130 Ah	90 ÷ 150 Ah	13A	24-13