



CBHF1-V2

Main features:


Compact & lightweight

Power from 96W up to 340W

Current from 8A to 14A

APPLICATIONS



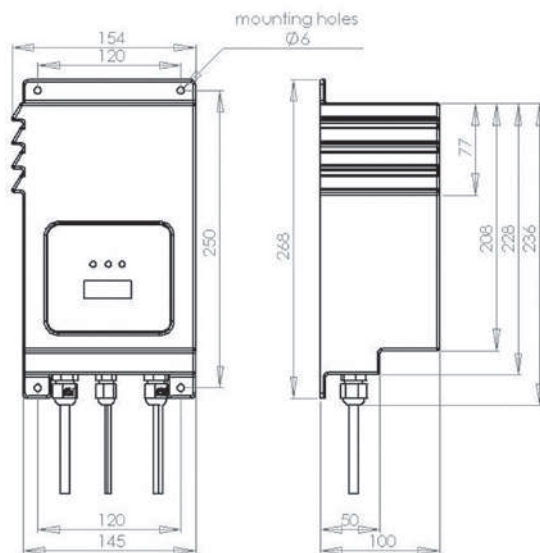

DIMENSIONS (LxWxH): 154x268x100 mm – 6.06x10.60x3.94 in
 WEIGHT: 2,00 Kg - 4.41 lbs
 PROTECTION GRADE IP30
 INPUT VOLTAGE: 208 ÷ 240 Vac – 50-60 Hz

Battery Voltage	Battery Range		Charging Current	Model
	5h	20h		
12V	40÷80 Ah	60÷105 Ah	8A	12-8
	60÷100 Ah	70÷130 Ah	10A	12-10
	90÷120 Ah	120÷160 Ah	12A	12-12
	90÷130 Ah	120÷170 Ah	14A	12-14
24V	40÷80 Ah	60÷105 Ah	8A	24-8
	60÷100 Ah	70÷130 Ah	10A	24-10
	90÷120 Ah	120÷160 Ah	12A	24-12
	90÷130 Ah	120÷170 Ah	14A	24-14

